



Fully Modernized & Turbocharged TC66 Turbocone Crusher

Engineers and Manufacturers of Washing, Vibrating and Crushing Equipment


Description

Trio offers you a fully modernized and “Turbocharged” TC66 Turbocone crusher. In addition to the ruggedness and reliability of the bushing design, the Turbocone has all of the advanced features in demand in modern cone crushers. Most of the commonly used parts are 100% interchangeable between the Turbocone and other popular machines.

The TC66 Turbocone crusher is re-engineered with useful features such as Tramp Release & Clearing, Full Balance, Improved Hydraulic Clamp and Adjust and Improved Packaged Lube System. In addition, the crusher is “Turbocharged” with a special design to accept 25% more power to increase its capacity by up to 20%.

Benefits

- The ability to up horsepower by 25% provides capacity increases of up to 20%.
- Use the extra horsepower to get more throughput and/or finer products.
- Designed for full automation.
- Hydro-Pneumatic overload relief and clearing system increases the up time of the crusher and provides safe unplugging of a jammed cavity.
- Variable speed capabilities to optimize the performance of the crusher depending on product demand and shape requirements. Higher speed operation improves product cubicity.
- Improved reliability of the Lube and Hydraulic components increases uptime and reduces maintenance requirements.

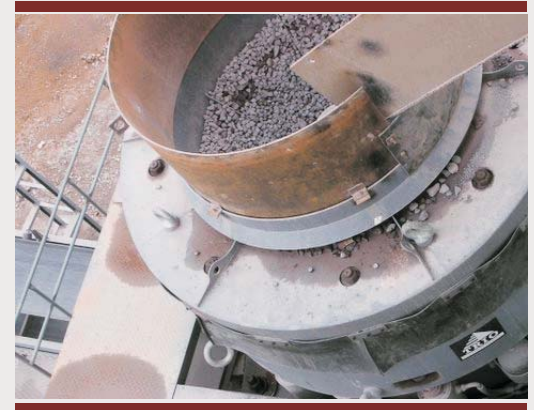

Applications

- Hard Rock
- Limestone
- Recycling

Other Considerations

- One Year Warranty
- Quick Deliveries
- Off-the-shelf parts
- Nationwide distribution
- Superior Quality
- Low Price Guarantee

Distributed by:




Trio Engineered Products, Inc. 128 Schabarum Avenue • Irwindale, CA 91706

Ph: (626) 851-3966 • Fx: (626) 851-9526 Web: www.trioproducts.com Email: info@trioproducts.com



Fully Modernized & Turbocharged TC66 Turbocone Crusher

Engineers and Manufacturers of Washing, Vibrating and Crushing Equipment



Liner Selection

Liner Type	Secondary		Tertiary	
	Min. Setting	Feed Open (OS)	Min. Setting	Feed Open (OS)
Ex-Coarse	1 1/2" (38 mm)	14 1/2" (370 mm)	1/2" (13 mm)	6" (150 mm)
Coarse	1" (25 mm)	10 3/4" (270 mm)	3/8" (10 mm)	5 1/4" (133 mm)
Medium	7/8" (22 mm)	9 5/8" (240 mm)	1/4" (6 mm)	3 1/2" (90 mm)
Fine	5/8" (16 mm)	8 3/8" (210 mm)	3/16" (5 mm)	2 3/4" (70 mm)

Note : Maximum feed size should be 80% of the open side(OS) feed opening

Open Circuit Maximum Capacities

THP	Closed Side Setting - Inches(mm)									
	1/4" / 6mm	3/8" / 10mm	1/2" / 13mm	5/8" / 16mm	3/4" / 19mm	1" / 25mm	1 1/4" / 32mm	1 1/2" / 38mm	2" / 50mm	2 1/2" / 50mm
Short	170	220	285	355	400	420	450	525	620	850
Metric	155	200	260	320	365	380	410	475	565	770

Product Gradations – Percent Passing

Note: Figures for 1/4" to 3/4" Closed Side Settings are for closed circuit application and the rest are for the open circuit application

Product Size	Closed Side Setting - Inches(mm)							
	1/4" / 6mm	3/8" / 10mm	1/2" / 13mm	3/4" / 19mm	1" / 25mm	1 1/4" / 31mm	1 1/2" / 38mm	2" / 50mm
4" (100 mm)								100
3" (75 mm)							100	90
2 1/2" (64 mm)						100	90	80
2" (50 mm)					100	90	80	65
1 1/2" (38 mm)				100	90	80	65	50
1 1/4" (32 mm)				90	80	65	50	30
1" (25 mm)			100	85	65	51	30	24
3/4" (19 mm)		100	85	65	49	31	24	17
1/2" (13 mm)	100	85	65	49	30	24	17	12
3/8" (10 mm)	87	65	49	31	22	17	12	8
1/4" (6 mm)	65	49	31	22	16	12	8	5
4# (5 mm)	50	30	22	16	12	8	5	3
6# (3 mm)	32	22	17	12	8	5	3	1
8# (2 mm)	22	17	12	8	5	3	1	0

Note 1: The values are for the average feed material with WI = 12 to 14

Note 2: The values in the above tables will vary with the method of feeding, feed distribution, feed segregation, crushing cavity, bulk density, fines in the feed, moisture content, fracture characteristics, speed, throw, etc.



Trio Engineered Products, Inc. 128 Schabarum Avenue • Irwindale, CA 91706

Ph: (626) 851-3966 • Fx: (626) 851-9526 Web: www.trioproducts.com Email: info@trioproducts.com